

Semiconvection: theory

H.C. Spruit

Max-Planck-Institut für Astrophysik, Karl-Schwarzschild-Str. 1, D-85748 Garching, Germany

February 19, 2013

ABSTRACT

A model is developed for the transport of heat and solute in a system of double-diffusive layers under astrophysical conditions (viscosity and solute diffusivity low compared with the thermal diffusivity). The process of formation of the layers is not part of the model but, as observed in geophysical and laboratory settings, is assumed to be fast compared to the life time of the semiconvective zone. The thickness of the layers is a free parameter of the model. When the energy flux of the star is specified, the effective semiconvective diffusivities are only weakly dependent on this parameter. An estimate is given of the evolution of layer thickness with time in a semiconvective zone. The model predicts that the density ratio has a maximum for which a stationary layered state can exist, $R_\rho \lesssim \text{Le}^{-1/2}$. Comparison of the model predictions with a grid of numerical simulations is presented in a companion paper.

Key words. stars: semiconvection – stars: mixing – convection: double diffusive, convection: thermohaline

1. Introduction

In stellar evolution, ‘semiconvection’ denotes the situation where a thermally unstable stratification is stabilized against (adiabatic) overturning by a gradient in composition (called *solute* in the following; typically the Helium concentration, increasing with depth). It was first recognized as a complication in the calculation of stellar structure by R. J. Tayler (1953). Uncertainty whether the stabilizing gradient should be ignored (‘according to Schwarzschild’), included in the condition for overturning (‘according to Ledoux’), or something in between has led to a number of different recipes for mixing of the Helium gradient. The evolution of the star subsequent to the semiconvective phase is sensitive to these differences (e.g. Weiss 1989, Langer et al. 1989, Langer 1991, Stothers & Chin 1994, Langer and Maeder 1995). The fluid mechanics encountered in geophysics in the same case of a thermally unstable stratification stabilized by a stabilizing solute is called double diffusive or thermohaline convection.

The observations show that such a stratification forms a stack of many thin layers, called a ‘staircase’, each consisting of overturning convection sandwiched between stable steps in composition and temperature (Turner & Stommel 1964, Padman & Dillon 1987, Schmid et al. 2010 and references therein). In effect, this is a ‘compromise between Schwarzschild and Ledoux’. Correspondingly, the net transport coefficients (of heat and solute) are intermediate between those of convection and diffusion.

The reason for this layer formation are understood (for references, cf. Spruit 1992, hereafter S92, and Zaussinger & Spruit 2013, hereafter ZS13). The main theoretical contribution in this context has been the work of Proctor (1981), who showed analytically that a finite amplitude layered state exists for conditions when the stratification is still linearly stable: layering is the result of a *subcritical* instability. His analysis applies to the case of vanishing diffusivity of the solute, and Prandtl number not exceeding $\mathcal{O}(1)$,

which is the astrophysically relevant case. In this limit, layered states exist whenever the Rayleigh number exceeds the critical value for normal convection, *independent of the strength of the stabilizing solute gradient*. An energy argument (S92) shows that the layered state in this case can be reached with an initial perturbation of vanishing amplitude as the layer thickness decreases.

Attempts have been made to address the astrophysical problem with direct numerical simulations (Merryfield 1995, Biello 2001, Rosenblum et al. 2011). This encounters two problems: the very high thermal diffusivity in a stellar interior (very small Prandtl number) cannot be matched without some form of approximation. More importantly the quantity of main interest, the effective mixing rate, depends on the thickness of the double diffusive layers formed, a quantity that is not a stable outcome of the simulations.

It makes sense to disentangle the ‘semiconvection problem’ into two parts: on the one hand the physics that determines the thickness of the layers, on the other hand the effective mixing rate for a given layering state. This separation is especially meaningful because observations in geophysics and laboratory experiments show layer thickness to be a slowly changing function of time compared with the overturning times within the layers. In the following we concentrate on the second question, that is, the mixing rate is studied as a function layer thickness.

It turns out that the simple observation of a layer structure consisting of an overturning zone between stable zones is sufficient to derive a predictive model for the effective transport coefficients (Sect. 3). It is sufficiently quantitative to be tested against the results from numerical simulations. The translation of the model to the astrophysical case of a compressible stratification can be done exactly in the limit where the layers are thin compared with the pressure scale height. It is given in sec. 6, and yields an easily implementable prescription for the mixing rate.

In the present treatment, the transition in composition and temperature between neighboring layers has a finite

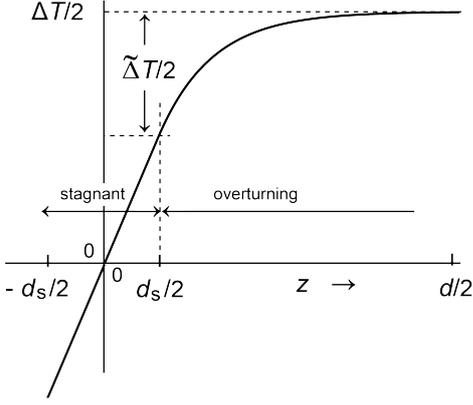


Fig. 1. Notation used, showing temperature as a function of depth through half of a semiconvective layer of thickness d , from the middle ($z = 0$) of the stagnant zone (of thickness d_s), to the middle of the overturning zone at $z = d/2$. ΔT is the temperature difference across the whole layer, $\tilde{\Delta T}$ across the overturning zone. The solute profile has the same shape but different amplitudes ΔS and $\tilde{\Delta S}$.

width, as opposed to S92, ZS10, where it was approximated as a step. This generalization turns out to make no significant difference for practical astrophysical application, but is essential for meaningful comparison of the theory with numerical results. Section 7 finally gives a (less quantitative) estimate of the layer thickness and its evolution in time.

The astrophysical term ‘semiconvection’ will be used in the text interchangeably with the terms ‘double diffusive’ or ‘thermohaline’ convection used in laboratory and geophysical literature¹.

2. Physics of a semiconvective layer

2.1. Notation and definitions

As in the above, we will use the term ‘layer’ for an individual double-diffusive step in the semiconvective staircase, and the term ‘solute’ for the stabilizing component (e.g. Helium in Hydrogen). Such a layer consists of a zone of overturning convection between adjacent stagnant zones. In the stagnant zones overturning convection is suppressed by a stable ($N^2 > 0$) density gradient, and transport of heat and solute takes place by diffusion.

As illustrated in Fig. 1, depth through the layer is counted from the middle of a stagnant zone. The thickness of the layer as a whole is d , that of the stagnant zone d_s . The temperature difference across the layer is ΔT , the solute difference ΔS . The stabilizing influence of the solute is expressed conveniently in terms of the density ratio, the ratio of density differences caused by temperature and solute differences ΔT and ΔS across the layer:

$$R_\rho = \beta \Delta S / \alpha \Delta T, \quad (1)$$

¹ Existing nomenclature is somewhat ambiguous. The opposite case of a destabilizing composition gradient in a stable thermal gradient is called ‘saltfingering’, but in geophysics also ‘thermohaline convection’, where our semiconvective case is often called ‘diffusive convection’ (e.g. Schmitt 1994). ‘Double diffusive’ is usually meant to cover both cases.

where α , the thermal expansion coefficient, is the relative density decrease per unit temperature and β , called the *haline contraction coefficient*, is the relative density increase per unit of solute concentration. Since density increases with S and decreases with T , the density differences are of the opposite sign when ΔT and ΔS both increase with depth (in the direction of gravity) as in our semiconvective case.

The flow in the overturning zone of the layer is driven by a temperature difference $\tilde{\Delta T}$ ($< \Delta T$) and opposed by a solute difference $\tilde{\Delta S}$ ($< \Delta S$). Associated with these is an ‘internal density ratio’, related to the overall density ratio by

$$\tilde{R}_\rho \equiv \beta \tilde{\Delta S} / \alpha \tilde{\Delta T} = R_\rho \frac{\tilde{\Delta S} \Delta T}{\Delta S \tilde{\Delta T}}. \quad (2)$$

Obviously, the values of $\tilde{\Delta T}$ and $\tilde{\Delta S}$ depend on where we define the boundaries between stagnant zone and overturning zone. Since the internal layer is actually convecting, the boundary has to be set at a point in the T, S profile where $\tilde{R}_\rho < 1$ (see also Sect. 3).

The overturning zone is characterized by a Rayleigh number; for convection in a layer of thickness D , with temperatures T_t and T_b at top and bottom, the Rayleigh number is

$$\text{Ra} = \frac{g \alpha (T_b - T_t) D^3}{\kappa_T \nu}, \quad (3)$$

where g is the acceleration of gravity, κ_T the thermal diffusivity, and ν the (kinematic) viscosity. In our case (Fig. 1), D has the value $d - d_s$. The critical value for onset of convection is of order $\text{Ra}_c = 1400$ (for no-slip boundary conditions). If viscosity is low, (Prandtl number $\text{Pr} = \nu / \kappa_T \ll 1$), the heat flux at large Rayleigh number becomes *independent* of viscosity, (a fact that is used implicitly in the ‘mixing length’ formalism for convection in a stellar interior). At high Ra , a more relevant quantity to characterize the heat flux in this case is the modified Rayleigh number Ra_* :

$$\text{Ra}_* = \text{Pr} \text{Ra} = \frac{g \alpha (T_b - T_t) D^3}{\kappa_T^2}. \quad (4)$$

Its square root can be read as the ratio of the thermal diffusion time D^2 / κ_T to the free fall time of the density contrast $\alpha (T_b - T_t)$ over the distance D .

Let F be the (time averaged) heat flux across the layer, and F_d the flux in the absence of convection, i.e. when the temperature profile between T_b and T_t is determined by diffusion only. The Nusselt number is then defined as

$$\text{Nu}_T = F / F_d. \quad (5)$$

Similarly, there is a Nusselt number for the solute flux F_S :

$$\text{Nu}_S = F_S / F_{Sd}. \quad (6)$$

In the absence of a solute, i.e. for normal (unstratified) laboratory convection, Nu_T is a function of Pr and Ra only (apart from boundary conditions and geometry). In the case of semiconvection, the Nusselt numbers are functions of two additional parameters characterizing the solute: the density ratio R_ρ and the Lewis number Le , the ratio of solute diffusivity κ_S and thermal diffusivity κ_T :

$$\text{Le} = \kappa_S / \kappa_T. \quad (7)$$

2.2. Transport coefficients: classical results

The heat flux is determined by the boundary layers at top and bottom. As the overturning flow passes along the boundary, the temperature contrast with the boundary diffuses into the flow, and it is this temperature difference that carries the heat flux. If τ is the time during which the flow is in contact with the boundary before descending/ascending into the bulk, the depth D_T over which the temperature difference penetrates is $D_T = (\kappa_T \tau)^{1/2}$. At high Rayleigh numbers, this depth is small compared with the layer thickness d . In a simple two-dimensional view of the flow the amount of fluid carrying this difference also scales with D_T . The same flow along the boundary determines how much solute contrast diffuses into the flow. The solute diffusion depth is thus $D_S = (\kappa_S \tau)^{1/2}$, and the amount of solute flowing into the overturning zone is proportional to D_S and inversely proportional to the flow speed v along the boundary.

The ratio of the convective fluxes of solute and heat is thus expected to scale as $(\kappa_S/\kappa_T)^{1/2}$. On the other hand, the (diffusive) fluxes over the thickness of the overturning layer, in the absence of convection, scale as κ_S and κ_T . In terms of the Nusselt numbers, this implies, in the limit $\text{Nu}_T, \text{Nu}_S \gg 1$ such that the boundary layers are thin compared with the layer thickness:

$$\text{Nu}_S = q \text{Le}^{-1/2} \text{Nu}_T, \quad (8)$$

where q is a numerical factor expected to be of order unity. If the heat flux is kept fixed, the effective diffusivity of the solute then scales as

$$\kappa_{s,\text{eff}} = \kappa_S \text{Nu}_S = q (\kappa_S \kappa_T)^{1/2} \text{Nu}_T. \quad (9)$$

These are classical scalings, as found in previous analyses of double diffusive convection, e.g. in Turner (1980, 1985). In this form they do not address the dependence of the fluxes on the density ratio R_ρ . The argument above implicitly assumes that all the density contrast in the solute boundary layer D_S is carried across with the flow. In reality, only a fraction of the boundary layer can flow across, namely the fraction that is not too buoyant to be carried down by the flow, respectively too heavy to be carried up. Taking this into account (Spruit 1992, hereafter S92), yields a correction to (8):

$$\text{Nu}_S = \frac{q}{R_\rho} \text{Le}^{-1/2} \text{Nu}_T. \quad (\text{Nu}_T \gg 1) \quad (10)$$

This scaling applies to the overturning zone; it would be valid for the layer as a whole only if the stagnant zone were absent. More precisely, it assumes that the thickness d_S of the stagnant zone is smaller than the thickness of the boundary layers D_T, D_S . This is not always the case (cf. Sect. 5 below). In the following, the presence of the stagnant zone is taken into account explicitly, by consistently taking the distinction between between Nusselt numbers for the overturning zone and those for the layer as a whole into account. This results in a generalization of (10).

2.2.1. ‘Erosion’

To determine the numerical factor q in (10) more quantitatively than order unity, the hydrodynamic interaction of the flow with the stagnant zone has to be considered in more

detail. This is somewhat beyond the scope of the model to be developed here, but we can identify a process involved, and use this to show that q is probably somewhat larger than unity. I will call q the ‘erosion factor’.

The unsteady flow in the overturning zone induces perturbations in the stagnant zone. Since it is stably stratified, these take the form of internal gravity waves. These can contain internal structure on length scales (perpendicular to the interface) less than the thickness of the stagnant zone. Diffusion of solute on these length scales increases the amount that has sufficiently low buoyancy to be carried with the overturning flow, hence we may expect $q > 1$. In the absence of a more detailed theory, its value can in principle be used as a fitting parameter, as long as it is not taken larger than order unity. In the following, however, I will ignore this option, and simply set

$$q = 1. \quad (11)$$

For astrophysical applications, the effective solute transport will turn out to be so low that tuning the erosion factor by order unity would have little effect anyway. At low Le , this erosion process takes place well inside the thermal boundary layer. It consequently affects only the transport of the solute; its effect on the transport of heat can be neglected.

3. Model

The layer of thickness d now consists (Fig. 1) of a stagnant zone of thickness d_S , and a overturning zone occupying the remainder of d . An incompressible (Boussinesq) fluid is assumed, to be generalized to the compressible astrophysical case in Sect. 6.

In the stagnant zone, we assume that the transport of heat and solute is by diffusion only (i.e. ignoring the possible ‘erosion’ effect discussed above). In the overturning zone of the layer, the flow is approximated as convection as it would take place in the absence of a solute. The presence of the solute affects the flow somewhat, but the amount of solute carried, and hence its influence on the flow, vanish in the limit of low solute diffusivity (S92, Schmitt 1994). Apart from the boundary conditions it sets, the stagnant zone has little effect on the flow inside the overturning zone. In the limit $\text{Le} \ll 1$ considered here, the effect of the solute on the flow of heat in the overturning zone can thus be neglected.

To describe transport of heat in the overturning zone, we use a fit from laboratory measurements for the Nusselt number as a function of the temperature difference. Since the thickness and temperature difference are different from those of the layer as a whole, the Rayleigh and Nusselt numbers of the overturning zone are distinguished here with a $\tilde{\cdot}$. With the notation

$$\epsilon = \tilde{\Delta}T/\Delta T, \quad \delta = d_S/d, \quad (12)$$

they are related to Ra and Nu_T by (cf. eq. 4 and the geometry sketched in Fig. 1):

$$\tilde{\text{Ra}}_* = \text{Ra}_* \epsilon (1 - \delta)^3, \quad (13)$$

$$\tilde{\text{Nu}}_T = \text{Nu}_T (1 - \delta)/\epsilon. \quad (14)$$

In the measurements of Niemela et al. (2000), at Ra up to 10^{17} , the Nusselt number is well fit by a power law of

slope 0.309 and amplitude 0.124. The Prandtl number in these experiments is order unity, so Ra_* and Ra are approximately the same. Combining the above, I approximate the heat flux in the overturning zone as given by

$$\tilde{Nu}_T = 1 + a(\tilde{Ra}_* - Ra_{*c})^b, \quad (a = 0.124, b = 0.309). \quad (15)$$

Since, as argued in 2.1 the dependence on Prandtl number is expected to be weak below $Pr = 1$, (15) will be assumed approximately valid for all $Pr \leq 1$ (this can be checked with numerical simulations, see Zaussinger and Spruit 2013, hereafter ZS13). The constant 1 and the critical Rayleigh number have been added to better approximate the behavior at low Ra_* .

The buoyancy of the solute is opposite to that of the driving temperature difference, and the flow will only be driven by density differences of the unstable sign. This implies that the solute concentration contrast in the overturning flow, \tilde{S} say, is limited by the temperature contrast \tilde{T} through

$$R_\rho \tilde{S} / \Delta S \leq \tilde{T} / \Delta T. \quad (16)$$

At the boundary between the overturning and the diffusive zones, these contrasts are $\tilde{S} = \tilde{\Delta}S$, $\tilde{T} = \tilde{\Delta}T$. Define then the location of this boundary as the point where the equals sign holds in (16), that is, the point where the buoyancy of the solute is just low enough for it to be carried with the thermally driven flow in the overturning zone (cf. discussion above). This yields the relation

$$\frac{\tilde{\Delta}S}{\Delta S} = \frac{1}{R_\rho} \frac{\tilde{\Delta}T}{\Delta T}. \quad (17)$$

In the overturning zone, the original scaling (8) applies, i.e. $\tilde{Nu}_S = Le^{-1/2} \tilde{Nu}_T$ (assuming $q = 1$), since $\tilde{\Delta}S$ is the density difference that can just be carried with the flow. At low Ra , \tilde{Nu}_S should approach unity at the same time as \tilde{Nu}_T . To accomplish this I adopt a slight modification:

$$\tilde{Nu}_S - 1 = Le^{-1/2} (\tilde{Nu}_T - 1), \quad (18)$$

which is now assumed to hold for all $\tilde{Nu}_T > 1$.

This completes the definition of the model. It defines the fluxes of heat and solute uniquely as functions of the external parameters.

4. Effective diffusivities

In a stationary state, the fluxes of heat and solute are constant with depth through the layer. The fluxes by diffusion in the stagnant zone are equal to the fluxes in the overturning zone. Expressing this in terms of the Nusselt numbers, we first need to write \tilde{Nu}_T and \tilde{Nu}_S in terms of the Nusselt numbers for the layer as a whole. For temperature this is given by (14):

$$Nu_T = \tilde{Nu}_T \frac{\epsilon}{(1 - \delta)}. \quad (19)$$

The equivalent relation for the solute is

$$Nu_S = \tilde{Nu}_S \frac{\epsilon_S}{(1 - \delta)}, \quad (20)$$

where (using 17):

$$\epsilon_S \equiv \tilde{\Delta}S / \Delta S = \epsilon / R_\rho. \quad (21)$$

The fluxes in the stagnant zone are given by:

$$Nu_T = (1 - \epsilon) / \delta, \quad Nu_S = (1 - \epsilon_S) / \delta. \quad (22)$$

(since carried by diffusion alone). With (18), eqs. (19)-(22) yield two equations for the unknown δ and ϵ :

$$(1/\delta - 1)(1/\epsilon - 1) = \tilde{Nu}_T, \quad (23)$$

$$(1/\delta - 1)(R_\rho/\epsilon - 1) = 1 + Le^{-1/2}(\tilde{Nu}_T - 1), \quad (24)$$

with \tilde{Nu}_T given by (15). Eliminating \tilde{Nu}_T between these two yields

$$1 - \delta - \epsilon / R_\rho = (1 - \delta - \epsilon) / Q, \quad (25)$$

where

$$Q = R_\rho Le^{1/2}. \quad (26)$$

Solving this for ϵ :

$$\epsilon = (1 - \delta) \frac{1 - Q}{1 - Q/R_\rho}. \quad (27)$$

Since ϵ must be a positive number, and R_ρ is larger than 1 (otherwise we would not be ‘below Ledoux’), it follows that in a stationary state as envisaged Q must be less than 1, or $R_\rho < Le^{-1/2}$. This is a necessary condition (independent of the Rayleigh number), but not sufficient. The actual, somewhat lower, value of the critical density ratio has to be determined from (19)-(20) by solving for δ as well as ϵ . To see how this solution comes about, consider the left-hand and right-hand sides of (23) separately. They represent the heat flux in the stagnant and the overturning zones, respectively, and in a stationary state they are equal. Fig. 2 shows the two as functions of δ , with ϵ taken from (27) and \tilde{Nu}_T from (15).

The two intersection points of the curves are potential solutions for a steady state. To see which of the two is the relevant one, consider the slopes of the curves. At the equilibrium point with the smaller value of δ the flux in the stagnant zone decreases more rapidly with δ than the flux in the overturning zone. A small decrease of δ away from the equilibrium would increase the flux in the stagnant zone relative to that in the overturning zone. This would result in a temperature deficit at the boundary between the two, causing the temperature to decrease there. This would reduce the heat flux in the stagnant zone again, the opposite of the assumed perturbation. This equilibrium point is thus the stable one; the intersect at the larger δ is an unstable point.

The necessary condition for existence of the layered state, $R_\rho < Le^{-1/2}$ also figures prominently in Proctor (1981). In his analysis it shows up as a necessary condition for its validity.

4.1. Maximum density ratio

The maximum density ratio can be determined as a function of Ra_* as the value for which the two curves in Fig. 2 just touch. The result is shown in Fig. 3. At large Ra_* , $R_{\rho \max}$ (slowly) approaches the value $Le^{-1/2}$. The behavior of Nu_T and δ near $R_{\rho \max}$ is shown in Fig. 4 for an illustrative case.

At the critical density ratio the value of δ is about 0.2 (cf. Fig. 2), while the Nusselt number reaches a minimum

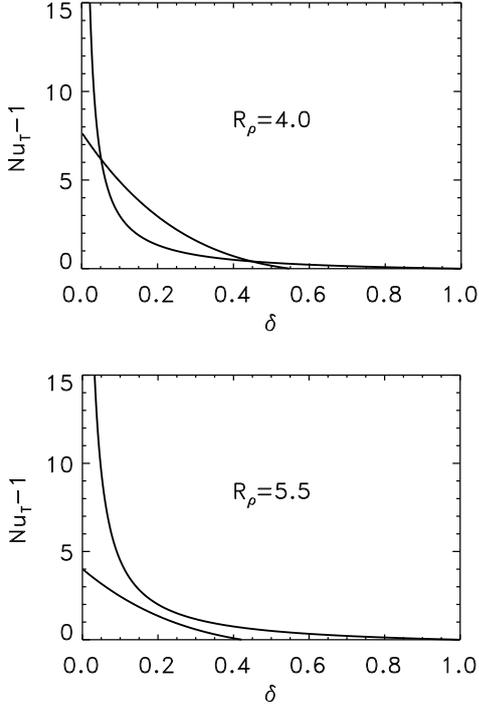


Fig. 2. Determination of the thickness δ of the stagnant zone, (example for $Ra_* = 10^7$, $Le = 0.01$, $Pr = 0.1$). The steep curve shows the heat flux in the stagnant zone as a function of the assumed value of δ , the shallow curves the corresponding flux in the overturning zone. Intersection points are possible values of δ for stationary heat flow. Top: density ratio $R_\rho = 4$. For the higher density ratio of 5.5 (bottom), there is no value of the thickness for which the two match (see text).

value of the order of a few. At this density ratio, the model predicts a jump from an overturning state ($Nu_T > 1$) to a purely diffusive state $Nu_T = 1$. An example is shown in Fig. 4. The presence of this jump suggests that the behavior of the system near the maximum density ratio needs a closer look than is possible with the present model. This question is explored with numerical simulations in ZS13.

The maximum on R_ρ can also be read as a minimum on the Rayleigh number. For an observed density ratio of 4 at $Le = 0.01$ for example, one should not expect to see double-diffusive layering with layer thickness less than corresponds to a Ra_* of 10^6 (from Fig. 3). In terms of the reference length d_0 defined below (Eq. 42), the layers must have a thickness $d/d_0 > 45$, for this combination of R_ρ and Le .

4.2. Solute flux

The net solute Nusselt number can be expressed in terms of Nu_T . Using (18)–(22) and (26)–(27), this yields the simple expression

$$Nu_S = 1 + \frac{1}{R_\rho Le^{1/2}} (Nu_T - 1). \quad (28)$$

The stagnant zone of finite thickness included here thus leads to the same relation between Nu_S and Nu_T as the simpler model in S92 (cf. eq. 10 above). There is a difference, however, in the relation between Nu_T and Ra_* , and in the presence of a maximum density ratio (cf. Figs. 3,4).

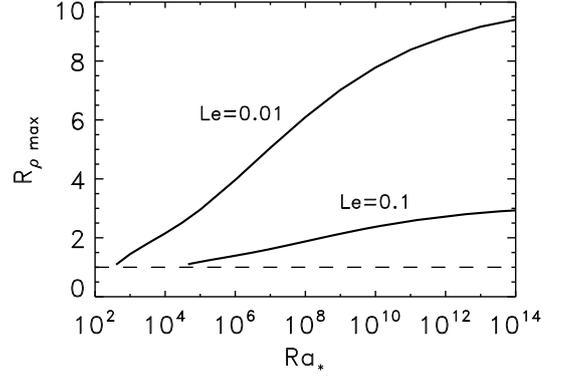


Fig. 3. Maximum value of the density ratio, as a function of the modified Rayleigh number of the layer, for $Le = 0.01$ and $Le = 0.1$.

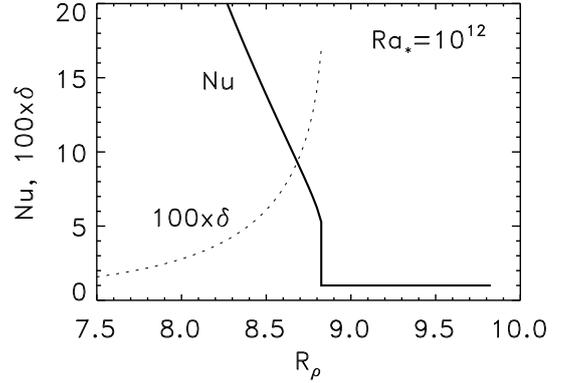


Fig. 4. Dependence of Nusselt number and thickness of the stagnant zone on density ratio R_ρ in a range around the critical value, for $Le = 0.01$, $Ra_* = 10^{12}$ ($R_{\rho \max} = 8.82$).

4.3. Asymptotic behavior

The Nusselt number is, with (19), (27):

$$Nu_T = \tilde{Nu}_T P \quad (29)$$

where

$$P \equiv \frac{1 - Q}{1 - Q/R_\rho} = \frac{1 - Le^{1/2} R_\rho}{1 - Le^{1/2}}, \quad (30)$$

and \tilde{Nu}_T is given in terms of \tilde{Ra}_* by (15). For $Ra_* \gg 1$, and with R_ρ not close to $R_{\rho \max}$, the stagnant zone is thin, $\delta \ll 1$. \tilde{Ra}_* as a function of R_ρ and Le is then, with (14), (27):

$$\tilde{Ra}_* \approx Ra_* P. \quad (Ra_* \gg 1, R_\rho < R_{\rho \max}) \quad (31)$$

The solute Nusselt number follows from (28),

$$Nu_S \approx \frac{Nu_T}{R_\rho Le^{1/2}}. \quad (Ra_* \gg 1, R_\rho < R_{\rho \max}) \quad (32)$$

It is instructive to compare δ to the thickness of the boundary layers D_T , D_S of the overturning zone. These can be written in terms of the Nusselt numbers Nu_T and Nu_S since at the boundaries with the stagnant zone the fluxes are carried by diffusion. For the thermal boundary layer for example this implies

$$D_T/(d - d_S) = 1/\tilde{Nu}_T. \quad (33)$$

Using (23), (27):

$$\tilde{Nu}_T = (R_\rho/P - 1)/\delta, \quad (34)$$

hence in the limit $\delta \ll 1$:

$$\delta \approx \frac{D_T}{d} \left(\frac{R_\rho}{P} - 1 \right) = \frac{D_T}{d} \frac{R_\rho - 1}{1 - Q}. \quad (35)$$

Unless Q is close to unity, the width of the stagnant zone is thus of the same order as the boundary layers of the overturning zone, and the distinction between the two becomes somewhat academic. At large density ratio, or under the fixed heat flux conditions discussed in the next Section, however, the distinction becomes more significant.

5. Fixed heat flux conditions

In laboratory situations and theoretical analyses it is usual to consider the temperature difference or temperature gradient as given and the heat flux or Nusselt number as the object to be determined. In some natural systems, however, the conditions under which double diffusive convection occurs are closer to ones where the heat flux is the given quantity. In the east African volcanic lakes, for example, the heat flux imposed by the influx at the bottom of the lake is probably more of a given than the temperature at the bottom of the lake. The same is the case in semiconvective zones of stars.

The temperature difference across the layers adjusts to an imposed heat flux. Since both the density ratio and the Rayleigh number depend on ΔT , neither of these can be used as control parameter any more. This requires a change of perspective on the problem.

The stratifications of both temperature and solute change with time, under the effective transport properties of the semiconvective process. In the limit of low solute diffusivity, the time scale for changes in the solute profile is long compared with the time scale on which the temperature profile adjusts. In this thermally quasisteady state, the solute profile can be taken as fixed. Assume therefore that the mean solute gradient dS/dz is given. As new control parameters, use the heat flux F and layer thickness d .

To make the imposed heat flux practical as control parameter, measure it with respect to a reference flux F_0 that can be expressed in terms of the solute gradient. Take for this the diffusive heat flux that would be present in the linear temperature profile $T_0(z)$ that is just marginally stable against adiabatic overturning ('Ledoux'). If K is the thermal conductivity, the heat flux of this stratification is

$$F_0 = K \frac{dT_0}{dz}, \quad (36)$$

and its density ratio is

$$R_{\rho 0} = \beta \frac{dS}{dz} / \alpha \frac{dT_0}{dz}. \quad (37)$$

Since we have assumed that the stratification is marginally stable, $R_{\rho 0} = 1$. The reference heat flux is thus

$$F_0 = K \frac{\beta}{\alpha} \frac{dS}{dz}. \quad (38)$$

The actual layered state has a Nusselt number Nu_T and a density ratio $R_\rho > 1$; by definition of the Nusselt number, its heat flux is

$$F = Nu_T K \frac{\Delta T}{d}. \quad (39)$$

With $\Delta S = d dS/dz$:

$$F/F_0 = Nu_T \frac{\alpha \Delta T}{\beta \Delta S} = Nu_T / R_\rho. \quad (40)$$

To replace the Rayleigh number as control parameter, note that it can be written in terms of solute gradient and density ratio as (using 1)

$$Ra_* = \frac{g\beta}{\kappa_T^2 R_\rho} d^4 \frac{dS}{dz}. \quad (41)$$

The quantity

$$d_0 = \left(\frac{\kappa_T^2}{g\beta} \frac{dS}{dz} \right)^{1/4} = (\kappa_T / N_S)^{1/2}, \quad (42)$$

is a characteristic length scale of the problem: the distance over which temperature diffuses on the buoyancy time scale of the stable solute gradient, $N_S^{-1} = (g\beta dS/dz)^{-1/2}$. The Rayleigh number can then be written as

$$Ra_* = \frac{1}{R_\rho} (d/d_0)^4. \quad (43)$$

The Nusselt number in (40) is a function of R_ρ and Ra_* , which can be evaluated from Eqs. (15,22,23,24) in Sect. 4 above. Together, eqs. (40) and (43) thus determine Ra_* and R_ρ , and other quantities of interest, as functions of the new control parameters d/d_0 and F/F_0 . An example of the dependence on d/d_0 of Ra_* , R_ρ , the Nu 's, and δ is shown in Fig. 5 for $F/F_0 = 3$.

5.1. Asymptotic dependences for fixed heat flux

The limiting case $d/d_0 \gg 1$ (corresponding to $Ra_* \gg 1$), has a pleasingly simple form. As expected from the discussion in Sect. 4 (cf. Fig. 3), the density ratio approaches its maximum value $Le^{-1/2}$ in this limit. With (40) and (28) the Nusselt numbers approach the value

$$Nu_S \approx Nu_T \approx Le^{-1/2} F/F_0 \quad (d/d_0 \gg 1). \quad (44)$$

For Nu_S , this is in fact a good approximation also at lower values of d/d_0 , as Fig. 5 (lower left) shows. The corresponding effective solute diffusivity becomes

$$\kappa_{s, \text{eff}} = Nu_S \kappa_S \approx (\kappa_S \kappa_T)^{1/2} F/F_0, \quad (45)$$

in agreement with the classical 'geometric mean of diffusivities' scaling. The thickness of the stagnant zone is related to Nu_S by eq. (22). In the present limit, $\epsilon_S \ll 1$, hence

$$\delta \approx Nu_S^{-1} \approx Le^{1/2} (F/F_0)^{-1} \quad (d/d_0 \gg 1). \quad (46)$$

The relative thickness of the stagnant zone is thus small for low Lewis numbers or at high heat flux. In the opposite case of modest Le and conditions closer to marginal, it can be a significant fraction of the layer thickness, however. This may be the explanation for the relatively large thickness of the stagnant zones observed in lake Kivu (Schmid

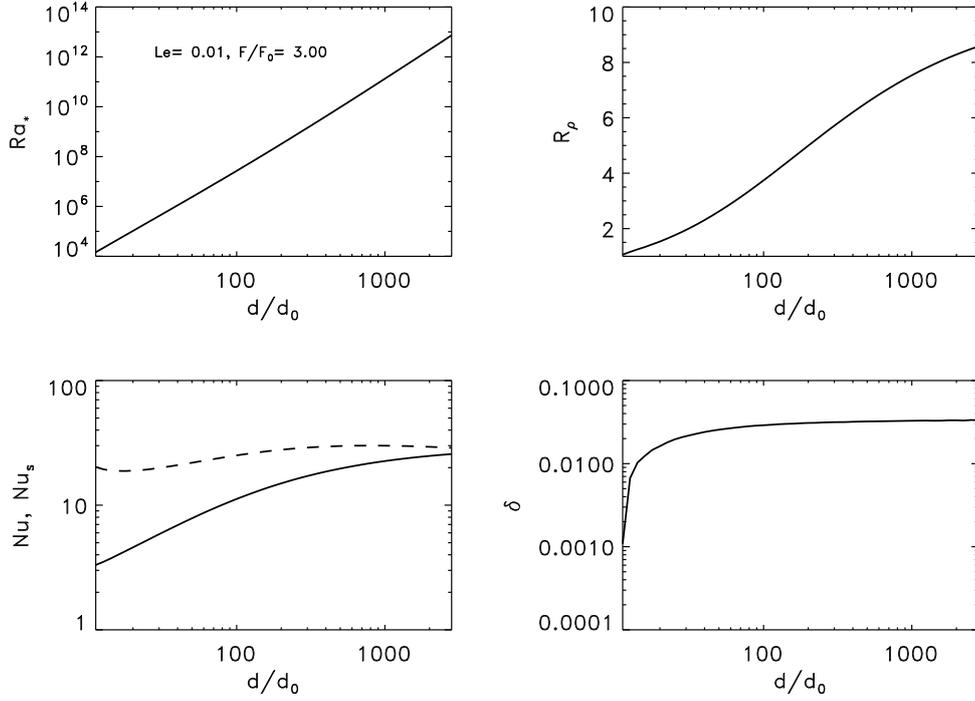


Fig. 5. Dependences on layer thickness d , for fixed heat flux conditions ($F/F_0 = 1.5$). In reading order: Rayleigh number, density ratio, Nusselt numbers (dashed for solute) and thickness of the stagnant zone.

et al. 2010). The heat flux measured there corresponds to Nusselt numbers of order 2. A stagnant zone thickness δ of order 30% is observed, larger than in other natural cases like the double-diffusive steps under the arctic ice sheet (e.g. Timmermans et al. 2008 and references therein). Though the present analysis does not apply directly to this case because the assumption $\text{Pr} < 1$ does not hold ($\text{Pr} \approx 7$ for water), the thickness of the stagnant zones in lake Kivu may be an indication that it is actually close to the marginal state to be expected at imposed low heat flux conditions.

5.1.1. Thickness of the stagnant zone

As Fig. 5 shows, the density ratio approaches its maximum in the limit $d/d_0 \gg 1$ (cf Sect. 4.1):

$$R_\rho \approx \text{Le}^{-1/2} \quad \rightarrow \quad 1 - Q \ll 1. \quad (47)$$

The actual value of $1 - Q$ as a function of the parameters d/d_0 and F/F_0 is a somewhat complicated expression involving the coefficients a, b in (15) (it will not be needed in the following).

Comparing δ with the thermal boundary layer thickness D_T of the overturning zone then yields, from (35) :

$$\delta \approx \frac{D_T}{d} \frac{\text{Le}^{-1/2} - 1}{1 - Q}. \quad (48)$$

In this asymptotic case with fixed heat flux, the stagnant zone is thus much wider than the boundary layers of the overturning zone (but still thin compared with the layer thickness d). Its presence manifests itself in the approximate equality of Nu_T and Nu_S (eq. 44) as opposed to the original estimate (8).

6. Astrophysical conditions

For the compressible gas in a stellar interior, an incompressible approximation (Boussinesq) can still be used for flows on length scales small compared with the pressure scale height and time scales short compared with the sound travel time over this length, provided two factors are taken into account (e.g. Massaguer & Zahn 1980). First, the adiabatic lapse rate $(dT/dz)_a$ has to be subtracted from the temperature difference driving the flows. The modified Rayleigh number for a layer of thickness d is now

$$\text{Ra}_* = \frac{g\alpha}{\kappa_T^2} d^4 \left(\frac{dT}{dz} - \frac{dT}{dz} \Big|_a \right), \quad (49)$$

where $\alpha = 1/T$ for the ideal gas with constant ratio of specific heats assumed here. In terms of the logarithmic gradient $\nabla = d \ln T / d \ln p$:

$$\text{Ra}_* = \frac{gd^4}{\kappa_T^2 H} (\nabla - \nabla_a), \quad (50)$$

where H is the scale height of the gas pressure p ,

$$H = dz / d \ln p. \quad (51)$$

This length scale is not present in the Boussinesq case. An equivalent of the quantity d_0 used in Sect. 5 still plays a role as well, but in the astrophysical context H is a more conventional choice as reference length. Ra_* can then be written as

$$\text{Ra}_* = f^2 \left(\frac{d}{H} \right)^4 (\nabla - \nabla_a), \quad (52)$$

where the dimensionless number f ,

$$f = (gH^3 / \kappa_T^2)^{1/2}, \quad (53)$$

typically a large number, is the ratio of the thermal diffusion and free fall time scales over a pressure scale height. The dimensionless layer thickness d/H will be the control parameter replacing d/d_0 above.

A second difference concerns the radiative heat flux, since it is driven by the temperature gradient itself rather than the potential temperature². This affects the definition of Nusselt number, as well as the choice of control parameter specifying the heat flux. Define a thermal conduction constant k (a function of the opacity and the thermodynamic state of the gas), in terms of the the radiative heat flux F_r :

$$F_r = k\nabla. \quad (54)$$

Following standard notation, represent the total heat flux F by the radiative gradient ∇_r :

$$F = k\nabla_r. \quad (55)$$

∇_r will be the astrophysical control parameter specifying heat flux. The ratio of density changes due to composition and temperature changes upon adiabatic displacement in the stratification, i.e. the density ratio, is

$$R_\rho = \frac{\nabla_\mu}{\nabla - \nabla_a}, \quad (56)$$

where

$$\nabla_\mu = d \ln \mu / d \ln p, \quad (57)$$

and the μ the mean atomic weight per particle. Define the Nusselt number Nu_T through

$$F = k\nabla_a + \text{Nu}_T k(\nabla - \nabla_a), \quad (58)$$

so that it measures the part of the heat flux that is due to (only) the superadiabatic part of the temperature gradient, instead of the total heat flux. This has to be clearly distinguished from the ratio ∇_r/∇ of heat flux to radiative heat flux in the stratification, which one might consider the more logical definition of a Nusselt number. The latter includes, however, a flux which is irrelevant for the convective flow (the radiative heat flux due to the adiabatic part of the stratification); it would contribute even if there is no flow at all³. From (55), (56), (58) we obtain a relation between Nusselt number and density ratio for our astrophysical, imposed heat flux conditions:

$$\frac{\nabla_r - \nabla_a}{\nabla_\mu} R_\rho = \text{Nu}_T. \quad (59)$$

To complete the model, a prescription for the Nusselt number as a function of the control parameters is needed. For this, we assume that the layer thickness d is small enough that an incompressible approximation is valid, so the results of Sect. 4 can be used. Eqs. (18)–(26) then determine Nu_T as a function of Ra_* and R_ρ . Together with R_ρ from (56) and Ra_* from (50), this forms a set of equations for the superadiabaticity $\nabla - \nabla_a$ as a function of the control parameters d/H and ∇_r .

² Note that in the presence of a solute the superadiabaticity $\nabla - \nabla_a$ is not equivalent to the entropy gradient any more. Instead, it measures the gradient of *potential temperature*, the temperature on adiabatic displacement, in pressure equilibrium, relative to a given reference level.

³ The significance of this distinction is not apparent in some of the numerical work on semiconvection, e.g. Biello (2001).

6.1. Asymptotic results

This is a somewhat implicit algebraic problem, but the limiting case equivalent to $d/d_0 \gg 1$ in Sect. 5 again has a simple form. This limit corresponds to

$$f^2(d/H)^4 = \frac{gd^4}{\kappa_T^2 H} \gg 1, \quad (60)$$

or

$$d \gg l_0 \equiv (\kappa_T^2 H/g)^{1/4}, \quad (61)$$

i.e. d large compared to the length l_0 on which the thermal diffusion time scale equals the free fall time over a scale height. As before, R_ρ tends to its maximum, $R_\rho \approx \text{Le}^{-1/2}$ in this limit, so that

$$\text{Nu}_T \approx \frac{\nabla_r - \nabla_a}{\nabla_\mu} \text{Le}^{-1/2}, \quad (62)$$

while the superadiabaticity follows from (56):

$$\nabla - \nabla_a \approx \text{Le}^{1/2} \nabla_\mu. \quad (63)$$

The solute Nusselt number follows as in Sect. 5,

$$\text{Nu}_S \approx \text{Nu}_T, \quad (64)$$

so the effective solute diffusivity is

$$\kappa_{S\text{eff}} = (\kappa_S \kappa_T)^{1/2} (\nabla_r - \nabla_a) / \nabla_\mu, \quad (65)$$

the same as in the simpler model of S92 and ZS10 (apart from a factor involving radiation pressure). It is independent of the layering thickness d , within the range of validity of the approximations,

$$l_0 \ll d \ll H. \quad (66)$$

The relative thickness of the stagnant zones is

$$\delta \approx 1/\text{Nu}_S = \text{Le}^{1/2} \nabla_\mu / (\nabla_r - \nabla_a). \quad (67)$$

For $\text{Le} \ll \nabla_r - \nabla_a$ the stagnant zone is thus thin compared with the layer thickness (but still significantly thicker than the boundary layers of the overturning zone, cf. Sect. 5.1.1).

7. Evolution of the layer thickness

The main uncertainty of any model for semiconvection is the thickness d of the double diffusive layers. In a stellar interior the layer thickness has little influence on the quantities of interest (eqs. 63, 65), but it can become important for the structure of the star when layer thickness becomes macroscopic, i.e. comparable with the pressure scale height.

In geophysical and laboratory cases, it is observed that d evolves secularly, on a long time scale compared with the thermal diffusion time. Layer thickness is therefore a quantity that *cannot be discussed independently of the history of the system*. The process has not been studied very extensively (but see Wirtz & Reddy 1979, McDougall 1981, Young & Rosner 2000, Ross & Lavery 2009, and the coffee table experiment in ZS13). The layer thickness increases by a process of merging of neighboring layers. Two mechanisms are observed: vanishing contrast, and drift of interface position. This is illustrated schematically in Fig. 6.

Which of these two dominates, why, and at what rate the merging takes place appears to be not well understood.

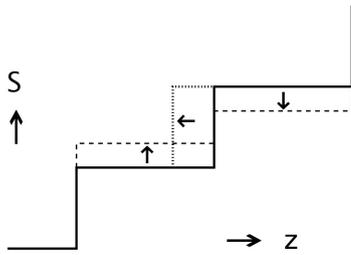


Fig. 6. Merging of two neighboring layers in a double diffusive staircase. The solute concentration can change by exchange between the two until the contrast disappears (dashed), or one can grow in thickness at the expense of the other (dotted).

From the model presented here, however, an estimate for the merging rate which is independent of this uncertainty can be derived, as well as the resulting layer thickness as a function of time.

Both merging mechanisms involve the redistribution of solute between neighboring layers. For example, if an interface between two layers transmits solute somewhat faster than average, the contrast between them decreases. The time scale τ on which such changes take place is limited by the effective solute diffusivity, hence is of the order

$$\tau \approx d^2 / \kappa_{S \text{ eff}}. \quad (68)$$

The rate of merging is then

$$d \ln d / dt \approx 1 / \tau \approx \kappa_{S \text{ eff}} / d^2, \quad (69)$$

so that

$$d \approx (2\kappa_{S \text{ eff}} t)^{1/2}, \quad (70)$$

if $\kappa_{S \text{ eff}}$ is constant in time. The layer thickness is thus predicted to increase as the square root of time. This agrees qualitatively with the dependence inferred empirically in some laboratory experiments. In most of these, however, the layering is induced by lateral heating of the solute gradient rather than vertical heating, hence is not directly comparable with the astrophysical case. Wirtz & Reddy (1979) for example find an initial square-root-like dependence, which saturates when the thickness reaches the separation between the lateral boundaries.

In terms of a merging time scale t_m , (70) becomes

$$t_m \approx d^2 / 2\kappa_{S \text{ eff}}. \quad (71)$$

For a quantitative check, compare this to the measurements from lake Kivu, where the observed layer thicknesses are 0.3-0.5 m, the relative interface thickness δ of order 0.4 (Schmid et al. 2010). With the diffusivity of CO_2 in water, $\kappa_S = 2 \cdot 10^{-9} \text{ m}^2/\text{s}$, the effective solute diffusivity is

$$\kappa_{S \text{ eff}} = \text{Nu}_S \kappa_S \approx \kappa_S / \delta \approx 7 \cdot 10^{-9} \text{ m}^2/\text{s}. \quad (72)$$

For a layer of thickness 0.4 m this predicts a merging time of order 8 months. This agrees with the observed time scale for changes in the layering, of the order of several months. This comparison has to be taken with a grain of salt, of course, since the present analysis is not strictly valid for the Prandtl number of water.

8. Summary

The theory presented expands on the previous analyses in S92 and ZS10. It improves on these by including the effect of a *stagnant zone* of finite thickness. That is, the region over which heat and solute are transported by diffusion is not limited to just the boundary layers of the overturning interior of a double-diffusive step, but can in principle be an arbitrary fraction of the layer thickness. The need for this extension arose from observations of geophysical examples of thermohaline layering and results from numerical experiments.

A simple 2-zone model consisting of a stagnant and an overturning zone, and using an experimental fitting formula for convective heat transport in the overturning zone produces a clear physical picture for the dependence of the effective transport properties of double diffusive layered convection (Sect. 4). The results predict the existence of a maximum to the density ratio for which such a layered state can exist. It is of the order $R_{\rho \text{ max}} \approx \text{Le}^{-1/2} = (\kappa_T / \kappa_S)^{1/2}$ and approaches this value from below with increasing Rayleigh number (or layer thickness).

Of special interest is the astrophysical case where the heat flux rather than a temperature difference is given. In this case the dependence of effective solute diffusivity on solute stratification and heat flux has the simple form (65). This is the same as before in ZS10 and S92 (except for the effect of radiation pressure on the equation of state not included here). Due to the presence of the stagnant zone the value of the superadiabaticity (63) differs from that in S92, ZS10. For practical conditions in a stellar interior, however, $\nabla - \nabla_a$ is so small that its exact functional form makes little difference for the temperature stratification. The thickness of the stagnant zone is small relative to the layer thickness, as a consequence of the low value of the Lewis number.

The main conceptual difference with respect to ZS10 and S92 is the existence of a maximum to the density ratio. In the astrophysical case of imposed heat flux it plays only a rather implicit role, however. The differences are more significant when conditions are not in the astrophysically relevant limiting case. In numerical simulations in particular, which are necessarily much closer to marginal conditions for double diffusive layering, the stagnant zone and the maximum density ratio have a substantial effect on the results. A comparison with such simulations is presented in the companion paper ZS13.

Semiconvection is only one of the potential mixing processes in stars. Rotation induced mixing and magnetic processes are likely to be relevant as well, and could actually be more effective.

Acknowledgements. The author thanks F. Zaussinger for extensive discussions and suggestions, and the referee for many corrections and detailed comments which have led to significant improvement.

References

- Biello, J. A. 2001, Ph.D. Thesis, U. of Chicago
- Langer, N., El Eid, M. F., & Baraffe, I. 1989, A&A, 224, L17
- Langer, N. 1991, A&A, 252, 669
- Langer, N., & Maeder, A. 1995, A&A, 295, 685
- Massaguer, J.M. & Zahn, J.-P. 1980 A&A 87, 315
- McDougall, T. 1981, Progress in Oceanography, 10, 91
- Merryfield, W. J. 1995, ApJ, 444, 318
- Niemela, J., Skrbek, L., Sreenivasan, K.R. & Donnelly, R. 2000, Nature 404, 837.

- Padman, L. & Dillon, T.M., 1987, *J. Geophys. Res.*, 92, 10799
- Proctor, M.R.E. 1981, *Journal of Fluid Mechanics*, 105, 507
- Rosenblum, E., Garaud, P., Traxler, A., & Stellmach, S. 2011, *ApJ*, 731, 66
- Ross, T., & Lavery, A. 2009, *Experiments in Fluids*, 46, 355
- Schmid, M., Busbridge, M., Wüst, A. 2010, *Limnol. Oceanogr.* 55, 225
- Schmitt, R. W. 1994, *Annual Review of Fluid Mechanics*, 26, 255
- Spruit, H.C. 1992, *A&A* 253, 131 (S92)
- Stothers, R. B., & Chin, C.-W. 1994, *ApJ*, 431, 797
- Taylor, R.J. 1953, *Doctoral Dissertation*, Cambridge University
- Turner, J. S., & Stommel, H. 1964, *Proceedings of the National Academy of Science*, 52, 49
- Timmermans, M.-L., Toole, J., Krishfield, R. and Winsor, P. 2008, *Journal of Geophysical Research*, 113, C00A02
- Turner, J.S. 1980, *Buoyancy Effects in Fluids*, Cambridge University Press
- Turner, J.S. 1985, *Ann. Rev. Fluid Mech.* 17, 11
- Young, Y., & Rosner, R. 2000, *Phys. Rev. E*, 61, 2676
- Weiss, A., 1989, *A&A*, 209, 135
- Wirtz, R.A. & Reddy, C.S., 1979, *Journal of Fluid Mechanics*, 91, 451
- Zaussinger, F., & Spruit, H.C. 2010, arXiv:1012.5851 (ZS10)
- Zaussinger, F., & Spruit, H.C. 2013, submitted to *A&A* (ZS13)